


EM BattenLok[®] HS



DESCRIPTION:

The EM BattenLok[®] HS is a mechanically field seamed, high strength structural standing seam roof system. The EM BattenLok[®] HS panels have a 2" tall vertical seam and are available in both 12-inch and 16-inch widths. EM BattenLok[®] HS can be installed directly over purlins or bar joists and is capable of transitioning from roof to fascia. EM BattenLok[®] HS does not require a solid substructure for support.

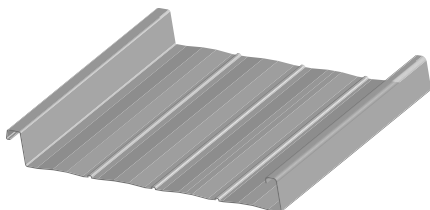


FEATURES AND BENEFITS

- Low and high clips are available to allow for various thicknesses of insulation to be installed between the panels and purlins.
- Heavier gauges, striations, embossing and installation over a solid deck minimize oil canning.
- Numerous UL 580 Construction ratings are available, as well as UL 790, Class A for external fire, numerous roof assemblies for UL 263 for internal fire and the UL 2218 Class 4 impact rating.
- EM BattenLok[®] HS carries Florida approval rating.

PRODUCT SPECIFICATIONS

- Applications: Roof
- Coverage Widths: 12" and 16"
- Minimum Slope: 1/2:12
- Panel Attachment: Concealed Fastening System; Low, High (fixed or floating), Utility (no insulation clearance)
- Gauges: 24 (standard); 22 (optional)
- Finishes: Smooth or Embossed; with Striations or Striations and Pencil Ribs
- Coatings: Galvalume[®] Plus, Signature[®] 200, Signature[®] 300, Signature[®] 300 Metallic

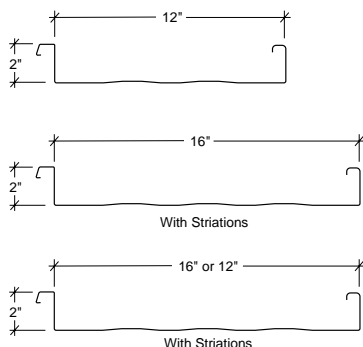

CATEGORY	CHARACTERISTIC	TEST METHOD	PURPOSE	RESULT
ENVIRONMENTAL	Air Leakage Through Roof Panel Joints	ASTM E1680	Determines the air leakage characteristics of metal roof panels under specified air pressure differences at ambient conditions	0.016 cfm/ft² at 1.57 psf static pressure 0.025 cfm/ft² at 6.24 psf static pressure
	Water Penetration Through Roof Panel Joints	ASTM E1646	Determines the resistance to water penetration of metal roof panels under uniform static air pressure difference	No uncontrolled water penetration through the panel joints at a static pressure of 20.00 psf
	Impact Resistance	UL2218	Determines impact resistance of prepared roof covering materials	Class 4 Rating
FIRE RESISTANCE	Room Fire Performance	UL790	Standard for standard test methods for fire tests of roof coverings	See Class A Fire Rating Data Sheet*
	Room Fire Performance	UL 263	Standard for fire tests of building construction and materials	For use in Design Nos. P225, P227, P230, P237, P265, P268, P508, P510, P512, P701, P711, P720, P722, P726, P731, P734, P801, P815, P819
STRUCTURAL	Uplift Resistance	ASTM E 1592	Provides a standard procedure to evaluate or confirm structural performance under uniform static air pressure difference	See Load Chart Section*
	Gravity Loads	AISI S100	North American Specification for the Design of Cold-Formed Steel Structural Members	See Section Properties and Allowable Load Table Section*
ROOF LISTINGS	Roof Performance-Underwriters Laboratories	UL 580	Determines the uplift resistance of roof assemblies consisting of the roof and roof covering materials	Class 90 Rating-Construction Number 90, 176, 180, 238B, 437, 449, 451, 452, and 487
	Roof Performance Florida Approval	ASTM E 1592 FM 4471 UL 790	Florida product approval is the approval of products and systems, which comprise the building envelope and structural requirements of the Florida Building Code	See FL #11819.1
	Roof Performance-Texas Department of Insurance	UL 580	TWIA provides windstorm and hail insurance in areas exposed to hurricanes and currently provides windstorm and hail coverage in the following 14 "first tier" Texas coastal counties: Aransas, Brazoria, Calhoun, Cameron, Chambers, Galveston, Jefferson, Kenedy, Kleberg, Matagorda, Nueces, Refugio, San Patricio, and Willacy	See RC-24

*Additional data sheets and load charts available at www.exceptionalmetals.com.