



2-Piece Flex Snap-On Compression Product Data Sheet

Product Description

The 2-Piece Flex Snap-On Compression system is made with a flat face to help it conform to a radius edge. The system consists of a 24-gauge Galvalume® base and a snap-on cover notched in 3" intervals to easily snap over radial surfaces.

Features



- This edge is fabricated in 5' lengths; 3" – 8" widths.
- Cover is double-hemmed to prevent roof material from chafing.
- Can be installed on both inside and outside radius edges.
- Standard 2-Piece Snap-On Compression can be ordered with a flat face to match this detail.
- This edge trim does not conform to an arched or vaulted radius.
- LEED® compliant.

Installation

1. A wood nailer is required if 1" or greater of insulation is used.
2. This nailer should be attached to the wall in accordance with ANSI/SPRI ES-1.
3. Install in accordance with EXCEPTIONAL® Metals' Details #3110 and #3513.
4. Any deviation from the requirements set forth in detail drawings must be pre-approved, in writing, by the EXCEPTIONAL® Metals' Technical Department.

Warranty

EXCEPTIONAL® Metals offers a finish and substrate warranty. Contact the membrane manufacturer for any additional warranty that may be offered.

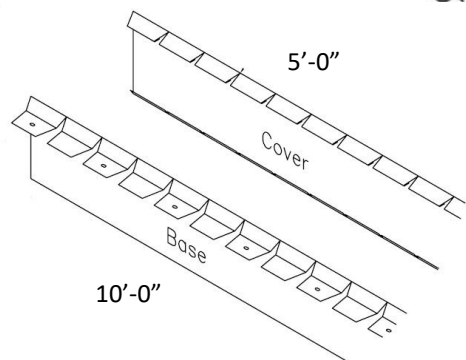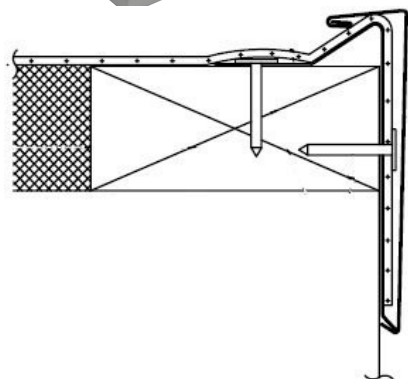

Material	Gauge	Finish
Aluminum	.040	Mill or Kynar®
Stainless Steel	24-gauge	N/A
Bonderized Steel	24-gauge	N/A
Galvalume®	24-gauge	Mill or Kynar®

For more information give us a call
or visit our website today.

800-248-0280 • exceptionalmetals.com