



Gutter

Product Data Sheet

Product Description

Four box-style profiles in three sizes each. Support straps are provided based on 30" centers.

- Front edge of gutter is 2" lower than the back edge.
- Internal splice plates eliminate the need to completely rivet sections together.
- Riveted inside and outside miters can be fabricated to any angle.
- Roof flanges can be bent to accommodate various roof pitches or eliminated altogether.
- Custom sizes and profiles are available.
- LEED® compliant.

Installation

1. Install in accordance with EXCEPTIONAL® Metals' Details #2091 and #3025.
2. Any deviation from the requirements set forth in detail drawings must be pre-approved, in writing, by the EXCEPTIONAL Metals' Technical Department.


Warranty

EXCEPTIONAL Metals offers a finish and substrate warranty. Contact the membrane manufacturer for any additional warranty that may be offered.

Technical Services

Product samples, detail sheets, color chips, and color chart are available for your submittal package. For assistance with questions or submittals, contact your local representative or call EXCEPTIONAL Metals.

Material	Gauge	Finish
Aluminum	.040	Mill or Kynar®
Stainless Steel	24-gauge	N/A
Bonderized Steel	24-gauge	N/A
Galvalume®	24-gauge	Mill or Kynar®
Copper	16 oz.	Mill

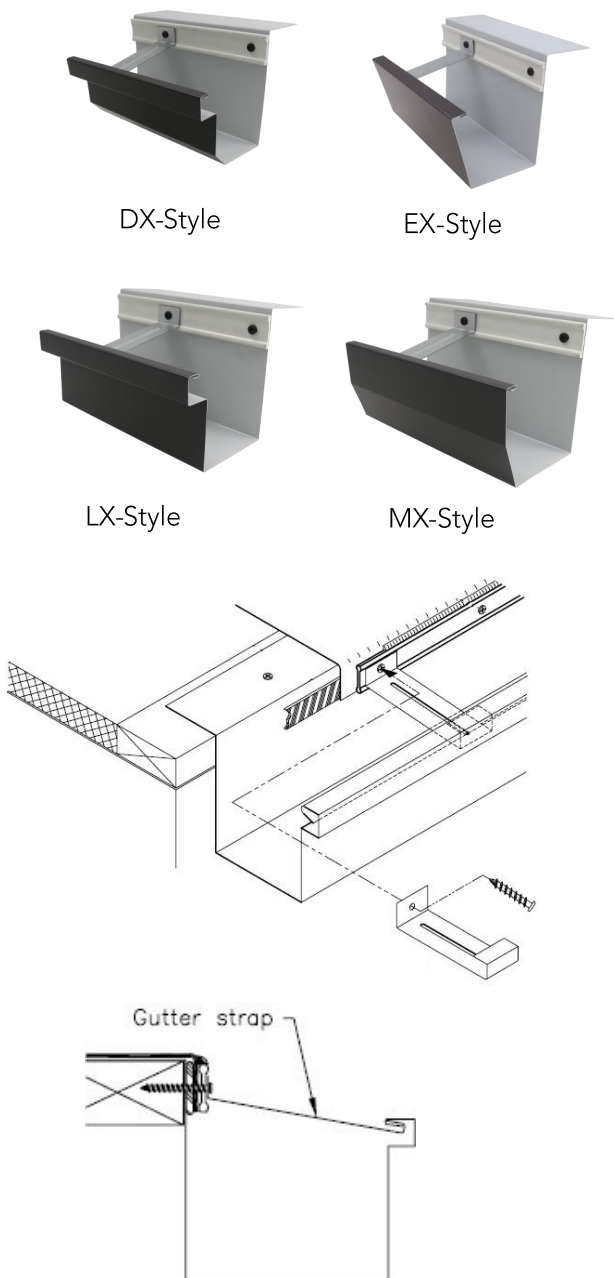

Note: The quantity and size of gutters are the responsibility of the contractor or design professional.

For more information give us a call
or visit our website today.

800-248-0280 • exceptionalmetals.com