




1-800-248-0280
831 Morley Drive
Saginaw, MI 48601


DETAIL E3520

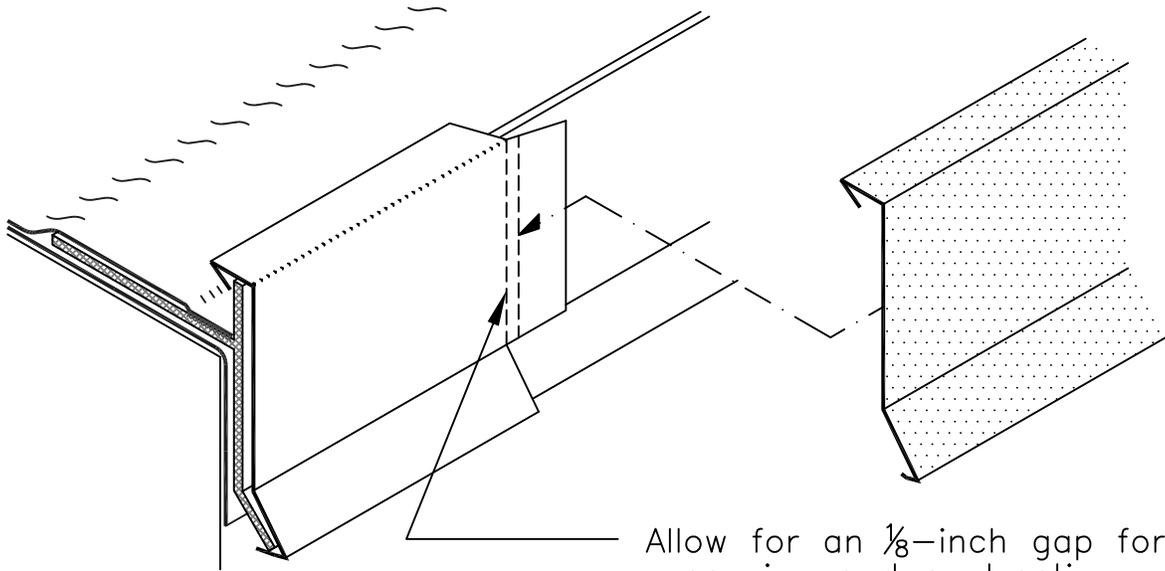

Allow for an $\frac{1}{8}$ -inch gap for expansion and contraction.
(Expansion tab must install beneath the next installed piece)

Note: Joints on the gravel stop must be offset by a minimum of 12-inches from the joints in the gravel stop cover.

*Be sure to caulk the gap between sections of vinyl gravel stop.

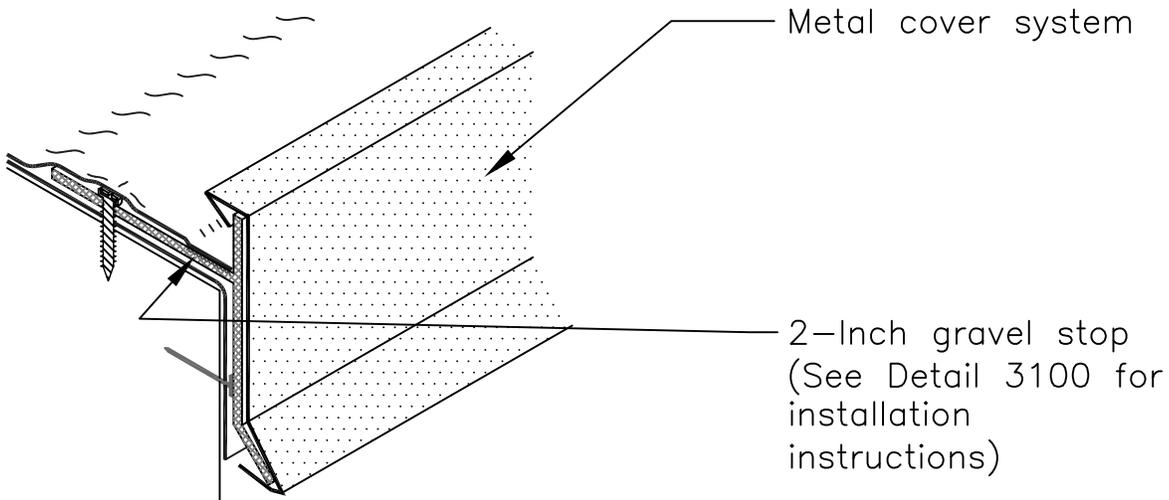

Metal cover system

2-Inch gravel stop
(See Detail 3100 for installation instructions)

THE USE OF THIS DETAIL IS NOT ALLOWED ON FULLY ADHERED APPLICATIONS.

DATE: JANUARY 2013

METAL EDGE DETAIL

DRAWN BY: ENG. DEPT.

2-INCH METAL GRAVEL STOP SYSTEM

SCALE: NONE

NEW CONSTRUCTION OR RE-ROOF