




1-800-248-0280  
831 Morley Drive  
Saginaw, MI 48601

DETAIL E6040

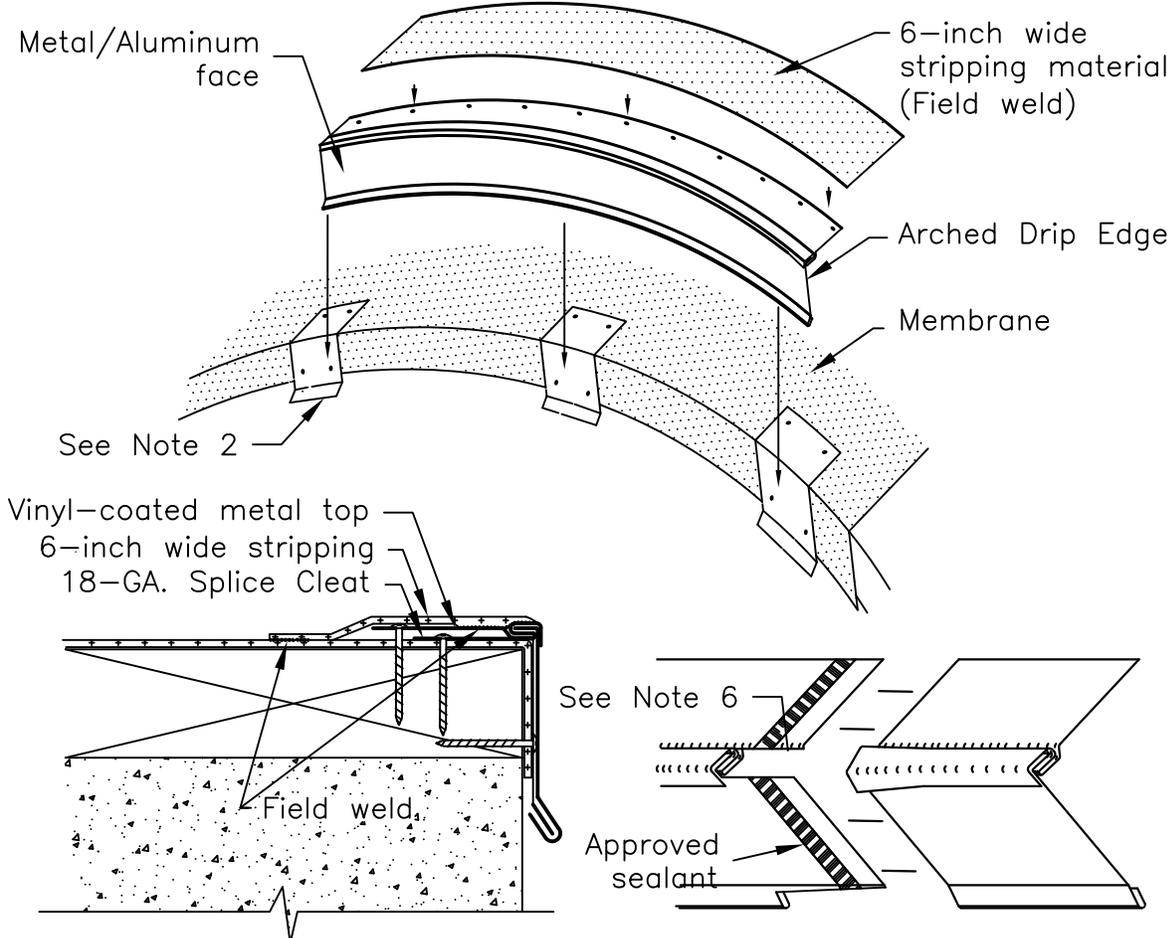

- Note 1: Splice Cleats are required when face size is 4-inches or greater. Splice Cleats are installed 24-inches on center using four approved fasteners. (Must position a Cleat at each joint).
- Note 2: Fasteners are spaced no greater than 6-inches on center.
- Note 3: When more than one Arched Drip Edge is used, install the Drip Edge to shed water down the arch by centering one section at the top of the arch.
- Note 4: This detail requires the 6-inch wide stripping to be field welded.
- Note 5: Edges pre-notched for an overlapped joint. Apply an approved sealant at all joints.

DATE: JANUARY 2013

EDGE DETAIL

DRAWN BY: ENG. DEPT.

ARCHED DRIP EDGE W/SPLICE CLEAT

SCALE: NONE

NEW CONSTRUCTION OR RE-ROOF