




1-800-248-0280
831 Morley Drive
Saginaw, MI 48601

DETAIL E6052

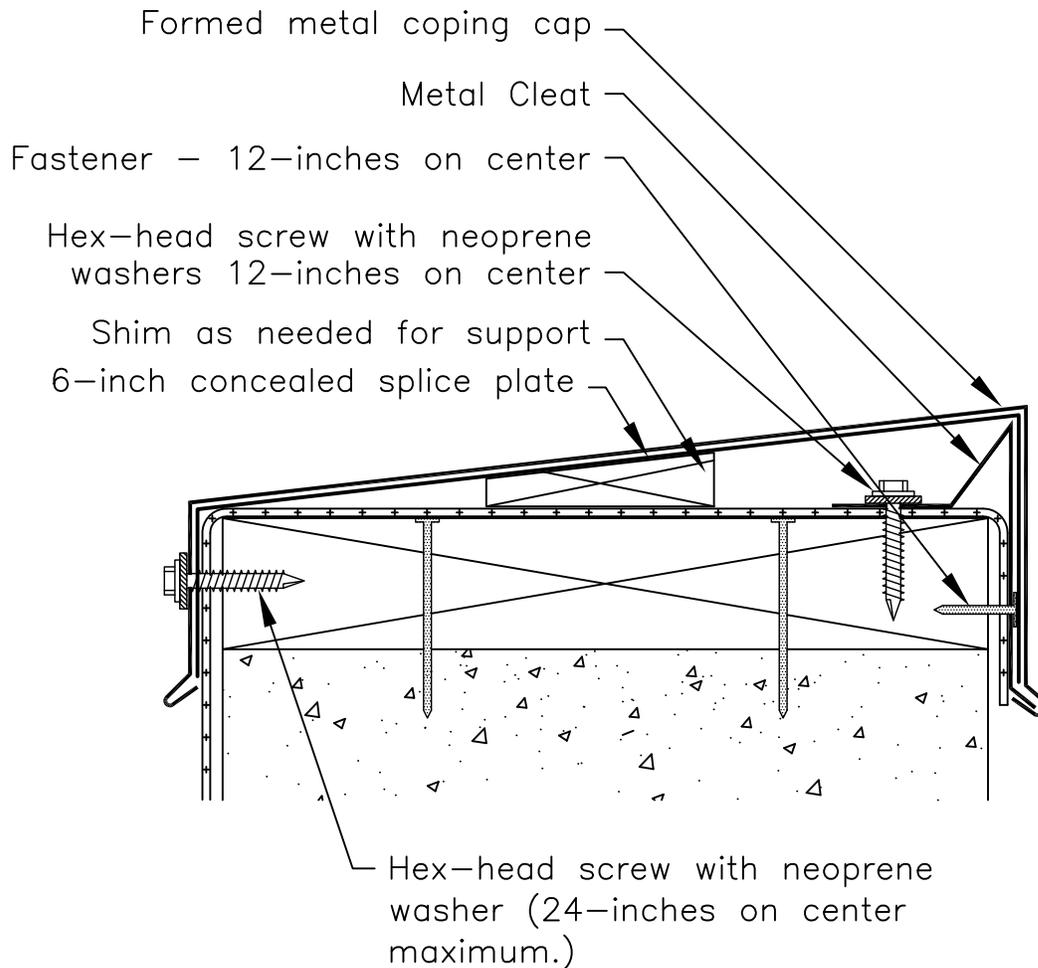

- Note 1: All coping cap joints must utilize a 6–inch concealed splice plate.
- Note 2: All joints are to be sealed with an approved sealant on top of the splice plate, on both sides of the joint. Leave a $\frac{1}{4}$ –inch minimum gap between Coping sections.
- Note 3: All Cleats must be fastened 12–inches on center.
- Note 4: All fasteners must penetrate into the wood nailer a minimum of 1 $\frac{1}{2}$ –inches.

DATE: JANUARY 2013

PARAPET WALL DETAIL

DRAWN BY: ENG. DEPT.

CANTED COPING W/CONT. BASE CLEAT

SCALE: NONE

NEW CONSTRUCTION OR RE–ROOF