




1-800-248-0280
831 Morley Drive
Saginaw, MI 48601

DETAIL E6050

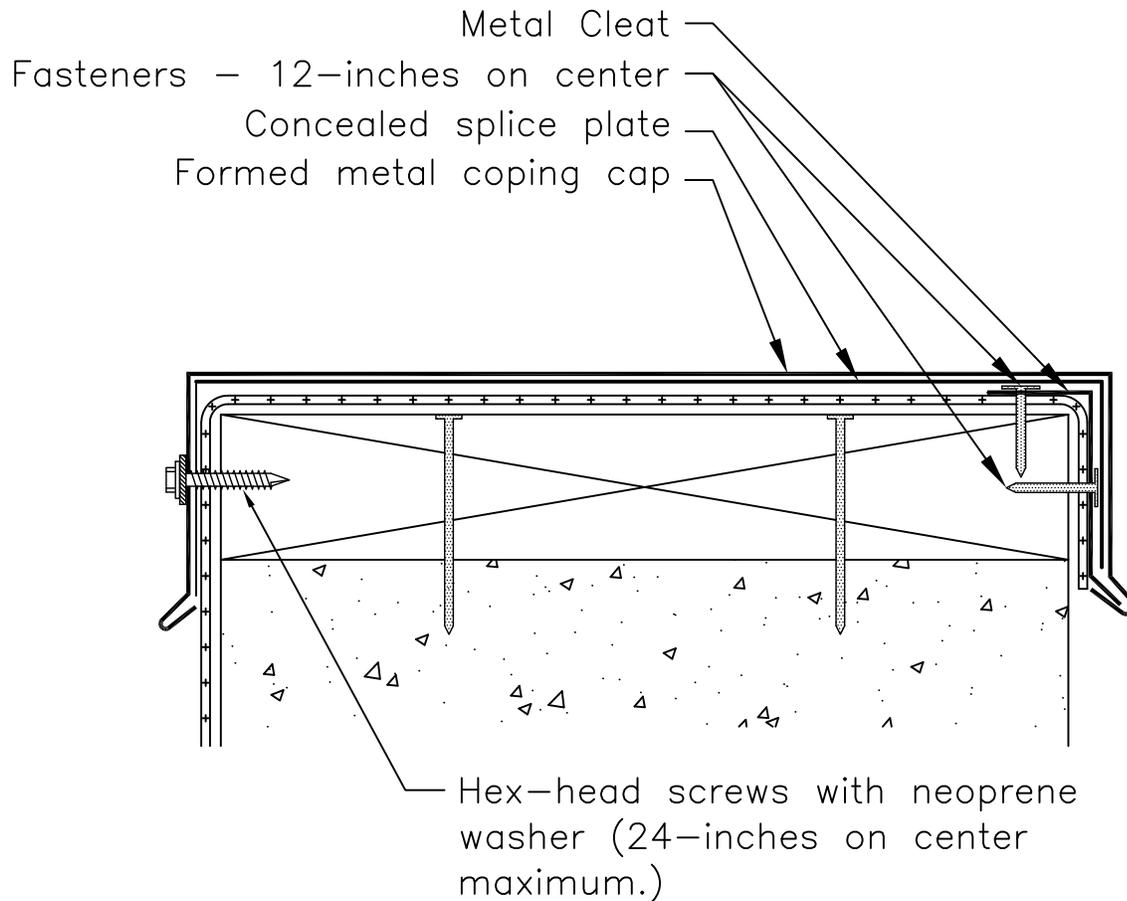

Note 1: All coping cap joints must utilize a 6-inch concealed splice plate.

Note 2: All joints are to be sealed with an approved sealant on top of the splice plate, on both sides of the joint. Allow a $\frac{1}{4}$ -inch gap between Coping sections to allow for expansions and contraction.

Note 3: All Cleats must be fastened 12-inches on center.

Note 4: All fasteners must penetrate into the nailer a minimum of $1 \frac{1}{2}$ -inches.

DATE: JANUARY 2013

PARAPET WALL DETAIL

DRAWN BY: ENG. DEPT.

FLAT COPING W/CONT. CLEAT

SCALE: NONE

NEW CONSTRUCTION OR RE-ROOF