





1-800-248-0280
831 Morley Drive
Saginaw, MI 48601

DETAIL E2061

Note 1:
Single Skirt
Scupper must
extend 1-inch
beyond the wall
opening.

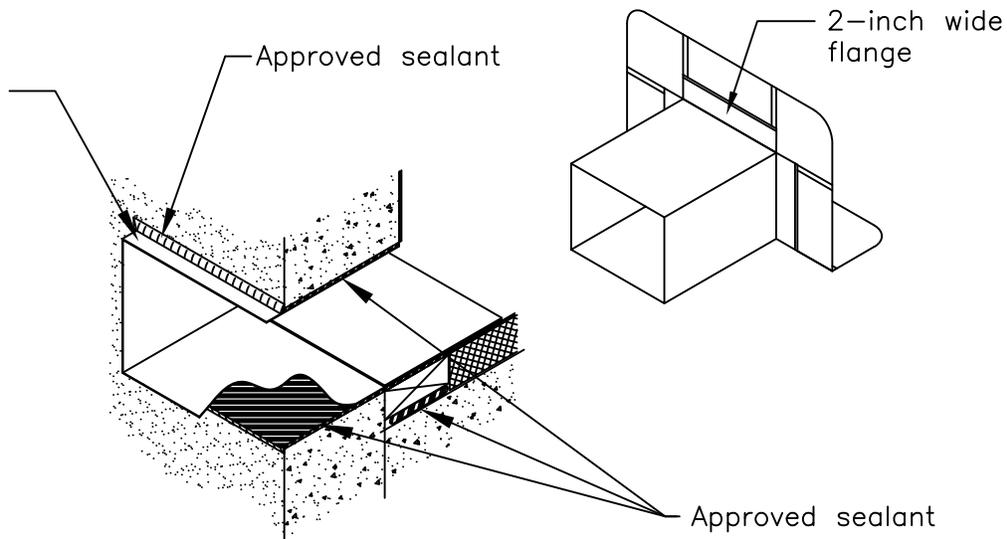

Back seal the parapet
flashing with approved
sealant where the flange
of the metal scupper is
attached to the wall.

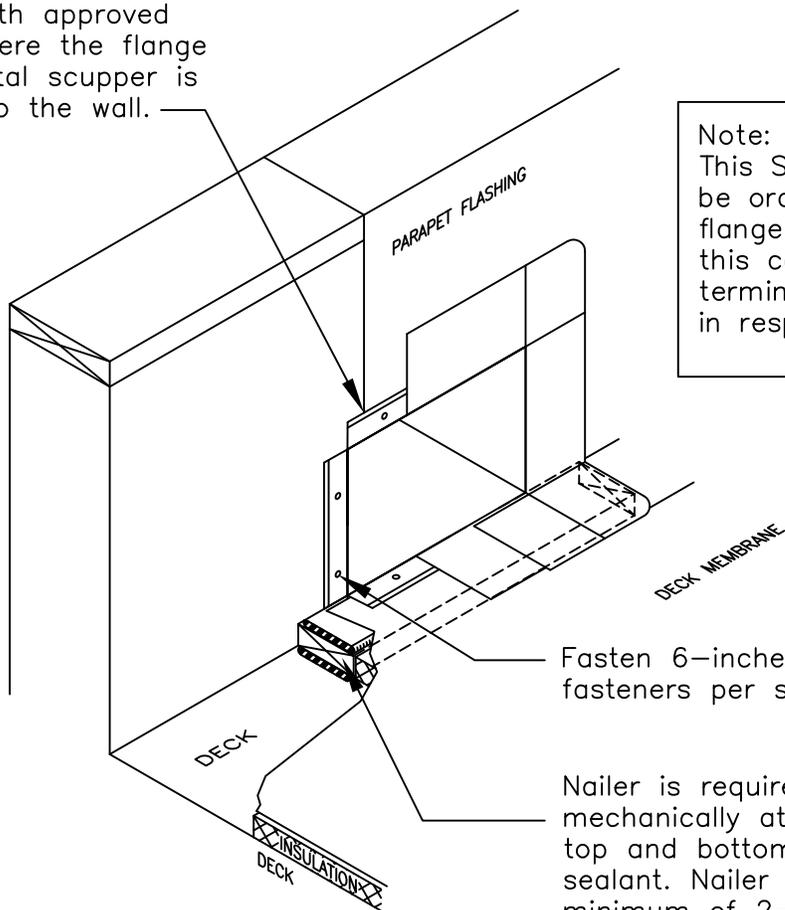

Note:

This Single Skirt Scupper can be ordered without a metal flange on the inside wall. In this case, the skirt must be terminated on the inside wall in respect to Detail 2060.

Fasten 6-inches on center, 2 fasteners per side minimum.

Nailer is required and must be mechanically attached and sealed at top and bottom using approved sealant. Nailer must extend a minimum of 2-inches beyond the opening of the scupper.

DATE: JANUARY 2013

DRAWN BY: ENG. DEPT.

SCALE: NONE

DRAINAGE DETAILS

SINGLE SKIRT METAL SCUPPER

NEW CONSTRUCTION OR RE-ROOF